

## Features

### Individually addressed and controlled multi-candela TrueAlert ES V/O (visible only) notification appliances provide:

- Multi-candela xenon strobe with synchronized 1 Hz flash rate and with intensity *programmable from the control panel* or jumper selected as 15, 30, 75, 110, 135, or 185 cd
- Advanced addressable notification controlled by **IDNAC SLCs** providing *regulated 29 VDC* allowing strobes to operate with lower current even under battery backup
- Wiring supervision to each appliance allowing “T-tapped” connections for Class B circuits to simplify wiring (Class A circuits require in/out wiring)
- **Self-Test Mode** allows an on-board sensor to detect the strobe output and then report its status to the control panel
- **TrueAlert Device Reports** at the control panel detailing appliance point ID, custom label, type, and candela setting (see sample on page 3)
- **Magnet Test diagnostics** to assist checkout and testing of appliances and wiring and **Electrical test point access** without removing cover
- Compatibility with ADA requirements; (refer to important installation information on page 3)
- Compatibility with legacy TrueAlert addressable systems for upgrade and replacement (see page 4)
- Listed to UL Standard 1971 and ULC Standard S526

### LED Indicator and Magnet Test feature:

- Appliance LED can be selected to display each polling cycle to indicate appliance supervision
- When the controller is in diagnostic mode, the Magnet Test pulses the LED to indicate appliance address and can be set to also briefly flash the strobe

### Mechanical design features include:

- Rugged, high impact, flame retardant thermoplastic housing in red with white letters or white with red letters, with clear lens, available with FIRE, ALERT, FEU, FEU/FIRE, or blank lettering
- Separate covers are available to change appliance type on-site or for replacement; covers can be easily removed without disturbing the connected housing and avoiding trouble conditions
- A separate mounting plate allows wiring to be completed before appliance is mounted; use with single gang, double gang, or 4-inch square box, flush or surface mount
- In/out wiring terminals for 18 AWG to 12 AWG
- Optional mounting adapters are available to cover surface mounted electrical boxes and to adapt to Simplex 2975-9145 boxes
- Optional red wire guards (see page 2 for details)

\* These products have been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7125-0026:0373 for allowable values and/or conditions concerning material presented in this document. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.



TrueAlert ES Addressable Strobes are Available in Red with White Lettering and White with Red Lettering

## Description

**TrueAlert ES addressable strobes** are individually addressed visible notification appliances that receive power, supervision, and control signals from a Simplex fire alarm control panel providing **IDNAC** Signaling Line Circuits (SLCs). (See compatibility list on page 4.)

## Strobe Application Reference

Proper selection of visible notification is dependent on occupancy, location, local codes, and proper applications of: the *National Fire Alarm Code* (NFPA 72), ANSI A117.1; the appropriate model building code: BOCA, ICBO, or SBCCI; and the application guidelines of the Americans with Disabilities Act (ADA).

## TrueAlert ES Operation Advantage

**TrueAlert ES addressable appliances on IDNAC SLCs** provide separate visible (and audible) notification using a single two-wire circuit that also *confirms connection to the individual notification appliance's electronic circuit*. This operation increases circuit supervision integrity by providing supervision that extends beyond the appliance wiring connections.

**Reduced current allows efficient IDNAC SLC operation.** With **IDNAC SLCs**, a *constant* 29 VDC source voltage is maintained, even during battery standby, allowing strobes to operate at higher voltage with lower current and ensuring a consistent current draw and voltage drop margin under both primary power and secondary battery standby. Efficiencies include wiring distances up to 2 to 3 times farther than with conventional notification, or support for more appliances per IDNAC SLC, or use of smaller gauge wiring, or combinations of these benefits, all providing installation and maintenance savings with high assurance that appliances that operate during normal system testing will operate during worst case alarm conditions.

## TrueAlert ES Operation Advantage (Cont'd)

**Reducing Installation and Testing Time.** With separate controls on the same two-wire SLC, installation time and expense for both retrofit and new construction can be significantly reduced. When Class B wiring is used, *wiring can be "T" tapped*, allowing more savings in distance, wire, conduit (size and utilization), and overall installation efficiency. Use of Self-Test and Magnet Test features improves installation efficiency. TrueAlert device reports conveniently identify information about each connected appliance.

## TrueAlert ES Diagnostics

**Test Features.** When IDNAC SLCs are in diagnostic mode, *Self-Test* and *Magnet Test* features provide individual appliance testing. With the *Self-Test* feature, *appliance operation can be confirmed without leaving the control panel*. Additionally, each appliance's LED can be selected to pulse when it receives a supervision poll during normal operation.

**Self-Test Details.** Selecting Self-Test Mode from the control panel allows on-board sensors, depending on the device type, to detect its own strobe and/or horn output and then report their status to the control panel.

## Product Selection

### TrueAlert ES Wall Mount Addressable Strobes

TrueAlert ES addressable VO (strobe) appliances include cover and matching mounting plate except as noted; Dimensions with Cover = 5 1/8" H x 5" W x 2 5/8" D (130 mm x 127 mm x 67 mm)

Model*	Cover Color	Wording	Lens Color	Model*	Cover Color	Wording	Lens Color
49VO-WRF(-BA)	Red	FIRE	Clear	49VO-WRQ	Red	FEU	Clear
49VO-WWF(-BA)	White			49VO-WWQ	White		
49VO-WRA(-BA)	Red	ALERT		49VO-WRS(-BA)	Red	Blank	
49VO-WWA(-BA)	White			49VO-WWS(-BA)	White		
49VO-APPLW(-BA)	Select cover and mounting plate separately						

### Separate Mounting Plate

Model	Color	Note
49MP-AVVOWR	Red	Mounting Plate <b>is required</b> when ordering model 49VO-APPLW(-BA)
49MP-AVVOWW	White	

### Separate Covers (Required when ordering model 49VO-APPLW(-BA))

Model*	Color	Wording	Model*	Color	Wording
49VOC-WRFIRE	Red	FIRE	49VOC-WRFEU	Red	FEU
49VOC-WWFIRE	White		49VOC-WWFEU	White	
49VOC-WRALT	Red	ALERT	49VOC-WRBLNG	Red	FEU/FIRE
49VOC-WWALT	White		49VOC-WWBLNG	White	
49VOC-WRS	Red	Blank	49VOC-WWS	White	Blank

\* **Note:** (-BA) indicates model is available either with or without the -BA suffix. Model numbers ending in -BA, APPLW models, and separate mounting plates are assembled in the USA.

### Mounting Adapters and Wire Guard

Model	Color	Description	Dimensions
4905-9937	Red	Surface Mount Adapter Skirt	5 3/8" H x 5 1/4" W x 1 5/8" D (136 mm x 133 mm x 41 mm) Total depth with strobe = 4 3/8" (111 mm)
4905-9940	White		
4905-9931	Red Adapter Plate for mounting to Simplex 2975-9145 Box (typically for retrofit, mount vertical or horizontal)		8 5/16" x 5 3/4" x 0.060" Thick (211 mm x 146 mm x 1.5 mm)
2975-9145	Red Mounting Box, requires 4905-9931 Adapter Plate		7 7/8" x 5 1/8" x 2 3/4" D (200 mm x 130 mm x 70 mm)
4905-9961	Red wire guard with mounting plate, compatible with semi-flush or surface mount boxes		6 1/16" H x 6 1/16" W x 3 1/8" D (154 mm x 154 mm x 79 mm)

## TrueAlert ES Diagnostics (Continued)

**Self-Test Details (Continued).** Operation is by selected VNAC appliance groups and is either automatic (all briefly simultaneously activated) or individually activated by applying a magnet. (Refer to control panel data sheet for more Self-Test information, see list on page 4.)

**Silent Appliance Magnet Test.** In this test mode, in response to application of a magnet, the appliance LED pulses sequentially to conveniently indicate the appliance's address.

**Operational Appliance Magnet Test.** In this test mode, after the address is indicated by pulsing the appliance LED, the strobe will briefly flash to indicate proper operation.

**TrueStart Instrument Two (TSIT).** The 2nd generation of the Simplex TrueStart Test Instrument adds testing of IDNAC SLC wiring and TrueAlert ES appliances to its ability to test IDCs, NACs, and IDNet communications *before connection to the control panel*. Please contact your local Simplex representative for additional information.


## TrueAlert Addressable Wiring Isolator

**Isolator Model 4905-9929** is available for remote mounting on TrueAlert addressable circuits to isolate short circuited wiring from functioning wiring. (See data sheet S4905-0001.)


## TrueAlert Device Reports Reference

Service Port		Page 1	
REPORT 5 : TrueAlert Device Report		12:34:56am TUE 27-Jan-15	
POINT ID	CUSTOM LABEL	DEVICE TYPE	CANDELA
T14-1-1	Location Label . . . up to 40 characters	V/O	15
T14-1-2	Break Room 5	A/V	110
T14-1-3	Boiler Room	A/V	75
T14-1-4	Elec. Room 7	A/V	135

## Installation Reference

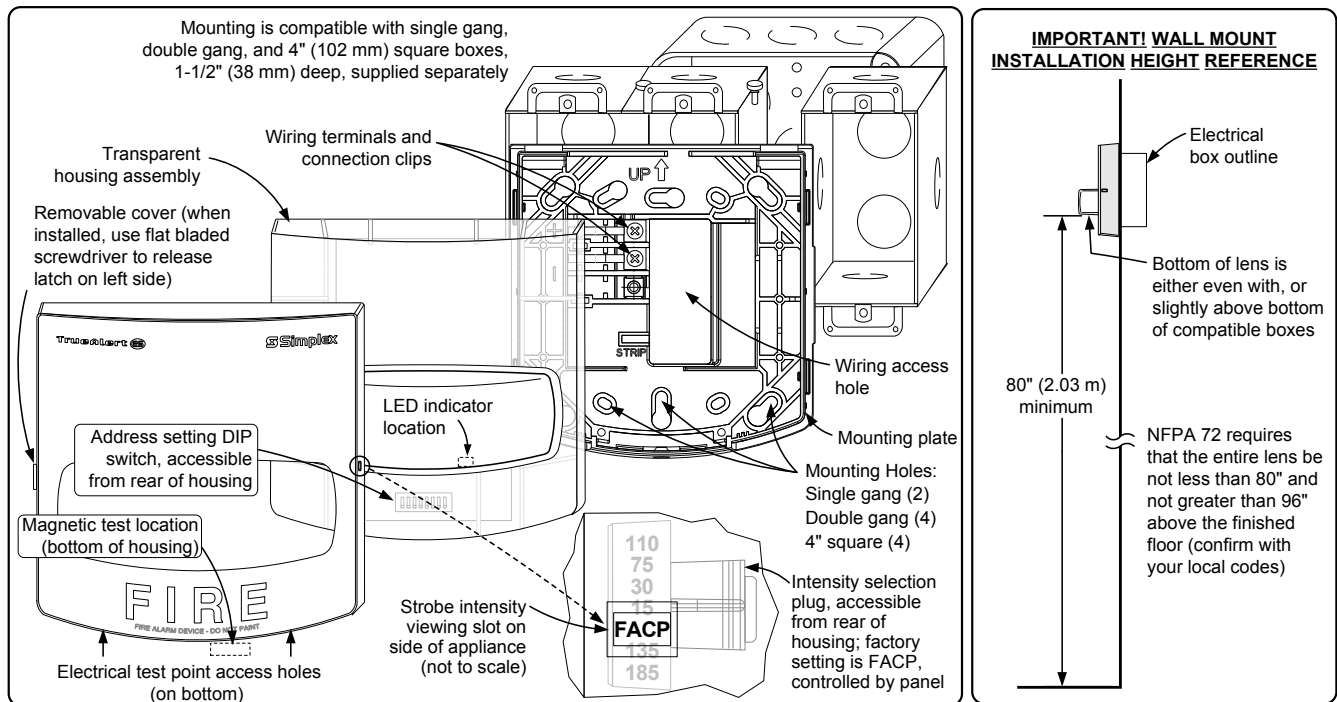

## Adapter Plate and Surface Mount Installation Reference

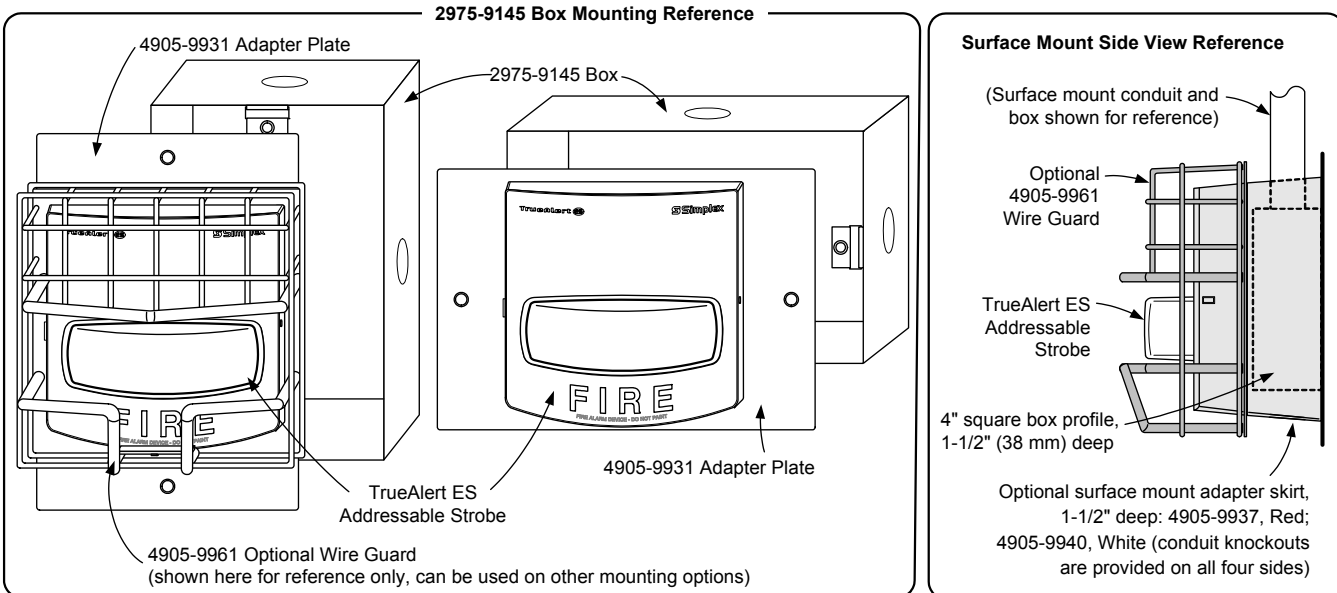

## IDNAC SLC Controller Compatibility Reference

Compatible Controllers	Data Sheet Reference	Controller Output	IDNAC SLC Output Voltage	Appliance Voltage Design Reference
4100ES with EPS+ or EPS Power Supply	S4100-0100	IDNAC SLC	29 VDC (regulated)	23 VDC (with 6 VDC drop)
4009 IDNAC Repeater	S4009-0004			
4007ES with IDNAC Notification	S4007-0002			
4010ES with ESS Enhanced System Supply	S4010-0011			

## TrueAlert ES Strobe Specifications

### Electrical Ratings

Typical Operating Voltage Range	23 VDC to 31 VDC, Special Application (see below for 17 VDC rating)					
Supervisory Requirements	1 unit load (= 0.8 mA control panel current)					
IDNAC SLC Loading	Maximum of 127 addresses per SLC, 139 unit loads					
<b>Candela Setting</b>	<b>15 cd</b>	<b>30 cd</b>	<b>75 cd</b>	<b>110 cd</b>	<b>135 cd</b>	<b>185 cd</b>
<b>23 VDC</b> RMS Current Ratings, for typical design of IDNAC Addressable SLCs (6 VDC drop)	47 mA	57 mA	100 mA	132 mA	160 mA	208 mA

### General Specifications

Temperature Range	32° to 122° F (0° to 50° C)
Humidity Range	10% to 93%, non-condensing @ 104° F (40° C)
<b>IDNAC SLC Wiring Specifications</b> (refer to control panel installation instructions for more information)	UTP, unshielded twisted pair recommended Maximum wire length allowed with "T-Taps" for Class B wiring per SLC = 10,000 ft (3048 m) Maximum wire length to any appliance = 4000 ft (1219 m)
Connections	Terminal blocks on mounting plate for 18 AWG to 12 AWG (0.82 mm <sup>2</sup> to 3.31 mm <sup>2</sup> ); two wires per terminal for in/out wiring
Installation Instructions	579-1031

**Notes:** Refer to compatibility table above for fire alarm control panel and power supply operation type.

## TrueAlert ES Strobe LEGACY Compatibility Reference

Compatible Controller	Data Sheet Reference	Controller Output	Available Strobe Intensity	Appliance Voltage Minimum
4100ES or 4100U with TrueAlert Power Supply	S4100-0031	TrueAlert Addressable SLC	15, 30, 75, and 110 cd	17 VDC
4009 TPS, Remote TrueAlert Power Supply	S4100-0037			
TrueAlert Addressable Controller (4009T)	S4009-0003			

### Electrical Ratings Reference for Retrofit Applications

Voltage Range	17 VDC to 31 VDC, Special Application			
<b>Candela Setting</b>	<b>15 cd</b>	<b>30 cd</b>	<b>75 cd</b>	<b>110 cd</b>
<b>17 VDC</b> RMS Current Ratings, use when connected to TrueAlert Addressable SLCs per above	62 mA	75 mA	133 mA	178 mA

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm Code are trademarks of the National Fire Protection Association (NFPA).



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA

S49VO-0001-6 11/2016

www.simplex-fire.com

© 2016 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.