





# PSU24-10A Intelligent Network Power Supply Unit

### Description

To support heavy consumption application, part of the fire alarm devices require for external 24VDC power supply. PSU24-10A Intelligent Network Power Supply Unit is the suitable choices. The supply source can be 110~230 VAC, 50/60 Hz. Nominal output load is 10A/24VDC. The built-in charger and maintenance-free sealed lead acid batteries ensure the standby supply.


With additional addressable feature, PSU24-10A is also possible to be connected into fire alarm loop. With the address control, it is able to report fault of mains loose, battery loose or output broken to the fire panel.

### **Features and Benefits**

- Seamless convert between mains and standby power sources.
- Built-in battery recharge with temperature compensation.
- Battery over-discharge protection.
- Indication of output voltage, output current, mains fault, battery fault, output fault and charger fault.
- Local audio fault indication.


#### **Installation Data**


PSU24-10A power supply unit is wall-mount/flush-mount combined. Its appearance and the mounting holes are shown here.

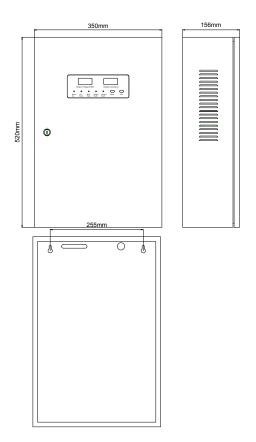

## **Terminals**

The terminals of the PSU are shown below.





L, N, PG:	AC input		
+,-:	Battery input		
24V, GND:	24VDC output		
Z1, Z2 (on the display board): Loop connection			
Power Fault:	24VDC fault contact, 30VDC/2A		
Battery Fault:	Battery fault contact, 30VDC/2A		
Mains Fault:	Mains fault contact, 30VDC/2A		

2.5mm<sup>2</sup> or above fire cable is recommended for 24VDC line, 1.0mm<sup>2</sup> or above fire cable is recommended for other signal lines, but subject to local codes.

# **Certificates and Compliance**

- Standards: CE / EN54-2 / EN54-4 •
- BS5839-1 Compliant
- WEEE & RoHS Compliant •

## **Technical Specification**

Mains Power	110VAC ~ 230VAC, 50/60Hz
Battery Size	24VDC /24Ah
Rated Output	10A/26.5V DC
Programming	Electronically addressing, from address 1 to 242
Ingress Protection	IP20
Operating Environment	Temperature: 0°C ~ +40°C Relative humidity≤95%, non condensing
Dimension	520mm × 350mm × 156mm

# **Order Information**

Part No.	PSU24-10A
Device Name	Intelligent Power Supply Unit
Order Code	1353146

# **Compatible Panels**

GST-IFP8 Intelligent Fire Alarm Control Panel GST200-2 Series Intelligent Fire Alarm Panels GST200N Series Intelligent Fire Alarm Panels

# Accessories and Tools



Part No.: Order Code:

P-9910B Device name: Handheld Programmer 1274894