

UltraKey Plus - HJK7000

FULLY PROGRAMMABLE KEYBOARD WITH COLOUR TOUCH SCREEN LCD

The UltraKey Plus keyboard represents an industry-leading approach to intelligent, user-friendly control of video management systems. Selection and control of any function within the video management system is available directly from the keyboard. Designed to take full advantage of the powerful features of Honeywell's video matrix and management systems, UltraKey Plus incorporates a large backlit colour touch screen LCD that can easily be configured with hundreds of menus and accessed dynamically using both hard key and soft key selections. Multiple control interface options are available including RS232, RS485, RS422 and Ethernet, with Power over Ethernet (PoE). And the UltraKey Plus has a web browser that can be used to configure basic parameters and upgrade firmware.

Dedicated hard keys are provided for common selections such as alternate camera, PTZ call, PTZ iris, focus, preset, Salvo and sequence selection, tours, review, search, user-programmed DVR or NVR control functions, and alarm acknowledge, selection and control. Selecting any of these keys will execute a function or dynamically select a menu on the LCD touch screen.

A touchpad allows jog controls and is surrounded by a four-button touchpad ring offering the most efficient playback operation possible. All hard buttons and soft buttons including the touchpad can be intercepted in MAXPRO® VMS or MAXPRO-Net allowing the keys to be programmed for any function the user desires. All hard keys have laser cut legends that will never fade and are backlit with dimmable blue LEDs.

The rate-proportional joystick allows control of variable speed PTZ mechanism or digital PTZ during playback. Two focus buttons and a centrally located joystick and iris button accommodate either right- or left-handed users. The UltraKey Plus also incorporates a soft rubber wrist rest that is field replaceable.

Market Opportunities

With its programmable control and interface options, UltraKey Plus offers an innovative and efficient method of operating medium and large video management systems (from hundreds to thousands of cameras). The result is unsurpassed control of any function within the video management system for any market.

Features

- Fully programmable customised menus
- Fully programmable LCD colour touch screen
- All buttons fully programmable
- Soft keys support different colours and text
- Touch pad and touch ring
- Ergonomic design with padded wrist rest
- Variable-speed joystick with integral zoom control
- Power over Ethernet capable
- Multiple interface options (RS232, RS485, RS422 software selectable and Ethernet)
- Locking power connector
- Dedicated keys for commonly used functions
- Dynamic menu selection
- Web interface for configuration and firmware upgrades
- Laser cut backlit keys
- Replaceable rubber wrist pad




UltraKey Plus - HJK7000

SPECIFICATIONS, DIMENSIONS, ORDERING

| Operational | |
|----------------------|---|
| Compatibility | MAXPRO-Net, MAXPRO VMS, MAX-1000, VideoBloX standard and NetCPU |
| Communication Speeds | 9600, 19200, 38400 baud |
| Operating Distances | RS485/RS422: 1219m, RS232: 15.2m, Ethernet 100m |
| Colour Touch Screen | TFT, LED Backlight, 320x249 |
| Joystick | 3-D axis proportional control |
| Keypad | Momentary, push-button, numeric and standard menu commands |
| Touch Wheel | Touch sensitive with 4 button touch ring |
| PTZ Dome Control | Full PTZ control using joystick, keypad control of iris open/close/auto and focus far/near/auto |
| Electrical | |
| Input Voltage | 100 - 240 VAC |
| Operating Voltage | 10.8 to 13.2 VDC @ 1 A or POE (48 VDC, Class 3) |
| Power Consumption | 12 W |

| Mechanical | |
|---|--|
| Dimensions (W x H x D) | 437 mm x 222 mm x 109 mm |
| Shipping Weight | 3.2 kg |
| Construction Housing | ABS+PC (cool grey) |
| Connections | |
| 1xEthernet (10Base-T, 100Base-TX) RJ45 with LED | |
| 1xRS232/422/485 RJ45 with LED | |
| Locking 12 VDC power connector | |
| Environmental | |
| Temperature | Operating: -10 to +55° C Storage: -40 to +75° C |
| Relative Humidity | 0%-95% (non-condensing) |
| Regulatory | |
| Emissions | FCC Part 15 class A EN55022 for radiated and conducted emissions, CE: Class B |
| Immunity | EN50130-4/A2:2003 |
| Safety | UL 60950-1 |

HJK7000

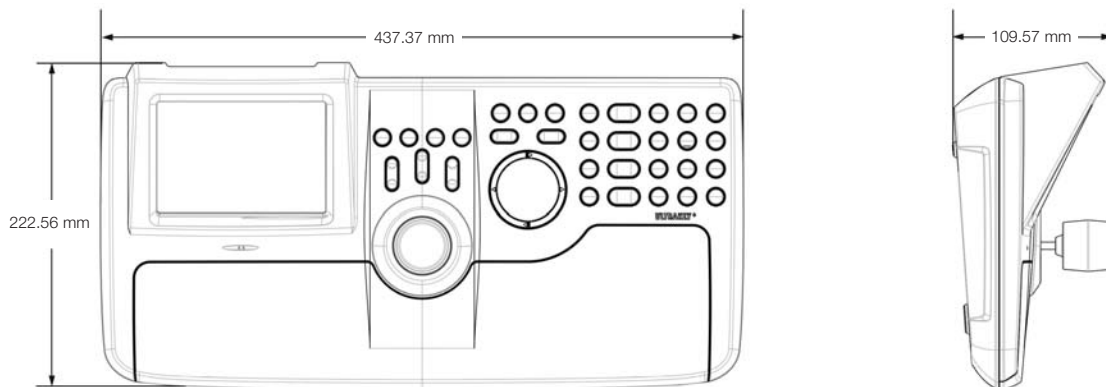

| Ordering | |
|----------|---|
| HJK7000 | Programmable joystick keyboard with colour touch screen includes 100-240 VAC power supply, RJ45 to DB9F (RS232), RJ45 to DB9M (RS422), RJ45 network cable, RJ11 4x6 ribbon cable. |

NOTE: Honeywell reserves the right, without notification, to make changes in product design or specifications.

For additional information,

please visit www.honeywell.com/security/me

Honeywell Security Group

LOB Building 08, Office 199
P.O.Box 18530, Jebel Ali
Dubai
United Arab Emirates (UAE)
Tel: +971-4-8073200
www.honeywell.com

HVS-HJK7000-01-ME(0510)DS-GCSC
May 2010
© 2010 Honeywell International Inc.