




## P-9911(J) Fire Telephone Jack

### Description

P-9911(J) is telephone jack socket, normally located at various places. Common installation positioning is in the landing levels of all core stairwells and escape routes, although the exact positioning is the responsibility of the project designer. The person on site with a mobile handset may just plug & talk to the control center. The unit should be mounted in a suitable and dry location at about 1.5m from finished floor level.

### Technical Specification

- Jack Diameter: 6mm
- Environment Temperature: -10°C to 50°C
- Humidity: <95%, non condensing
- Dimension: 85mm X 85mm X 12mm

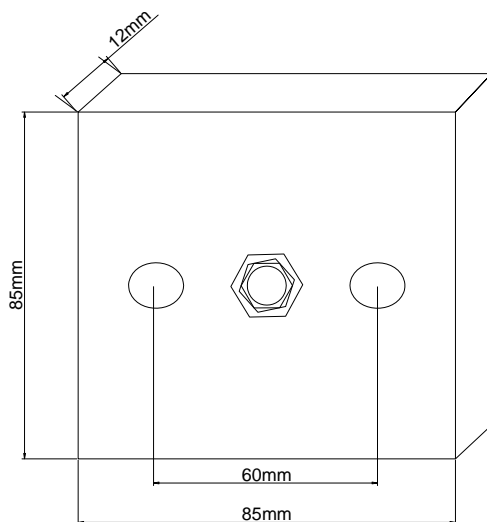

### Order Information

Part No.	P-9911(J)
Device Name	Fire Telephone Jack
Order Code	5320143
Compatible Products	GST-FT8WN Fire telephone panel GST-FT24N Fire telephone panel P-9911(M) Mobile fire telephone handset P-9911(H) Hands-free fire telephone handset