

# ULISSE

## OUTDOOR PTZ CAMERAS AND UNITS FOR HIGHEST PRECISION DAY/NIGHT MONITORING



### FEATURES

Variable speed: 0.02°-100°/s Pan; 0.02°-40°/s Tilt  
 Variable speed with UPTIRN LED illuminators: Pan 0.02°-40°/s - Tilt 0.02°-30°/s  
 Horizontal continuous rotation, vertical +90°/-40°  
 Housing for compact lenses  
 IP66  
 Autopan, Preset, Patrol  
 Position accuracy: 0.02°  
 Up to 250 Presets  
 Operating temperature: -20°C / +60°C (-4°F / +140°F)  
 Power supply available 230Vac, 24Vac or 120Vac

### OPTIONS:

Day/Night camera 36x, 28x  
 Prerangement for mounting of two UPTIRN LED illuminators  
 Germanium window for thermal cameras  
 Cold pack for low temperature down to -30°C (-22°F)  
 Wiper

### DESCRIPTION

ULISSE ensures maximum surveillance coverage in all outdoor environments, even the most difficult. It can operate 24 hours a day in demanding security applications, without requiring maintenance work.  
 This model can contain cameras with compact lenses.  
 The accurate top-mount construction ensures vision beyond the horizon and the continuous rotation on the horizontal axis, combining high speed to absolute tracking accuracy, both in manual mode and in patrol mode.  
 The versions with the integrated camera ensure excellent image quality, even in poorly lit environments.  
 To ensure detailed images even during the night hours, versions are available with LED illuminators, with infrared light or white light.  
 The PTZ unit can be equipped with a wiper for removing rain and dust from the front glass; there is a wide selection of jerry cans with washer pump, different capacities and heads.  
 The optimal operation is ensured in very hot environments up to 60°C or in very cold environments up to -30°, thanks to optional enhanced heating.  
 Models are available for vision with a thermal camera.



ULISSE



ULISSE + 2 UPTIRN



ULISSE FOR THERMAL CAMERAS

**TECHNICAL DATA****GENERAL**

Built in aluminium and ABS  
 Epoxypolyester powder painting, RAL9002 colour  
 Top mount (OTT)  
 Transmission through toothed belt  
 Slip-ring  
 Electronic limit switches  
 Plug installation thanks to connector and easy replacement on-site  
 Zero backlash  
 Configuration of telemetry protocol parameters through dip-switch for RS485

**MECHANICAL**

Cable glands: 3xM16  
 Horizontal rotation: continuous  
 Vertical rotation: +90° to -40°  
 Horizontal speed (variable): from 0.02°/s up to 100°/s (from 0.02°/s up to 40°/s, with LED illuminators)  
 Tilt speed (variable): from 0.02°/s up to 40°/s (from 0.02°/s up to 30°/s, with LED illuminators)  
 Internal usable area: See drawings  
 Enclosure glass window (WxH): 118x75mm (4.6x2.7in)  
 Preset accuracy: 0.02°  
 Unit weight: 16.3kg (36lb) (16.8kg (37lb), with LED illuminators bracket)  
 ULISSE, for thermal cameras:  
 Germanium window
 

- Dimensions (Ø): 70mm (2.8in) (external), 55mm (2.1in) (internal)
- Thick: 2mm (0.07in)
- External scratch-resistant treatment: Hard Carbon Coating (DLC)
- Internal antireflection treatment
- Spectral range: 7.5µm ÷ 14µm
- Medium transmittance (7.5µm ÷ 11.5µm): 94%
- Medium transmittance (11.5µm ÷ 14µm): 90%

**ELECTRICAL**

Power supply/Current consumption:
 

- 230Vac, 0.4A, 50/60Hz
- 24Vac, 4A (8A with LED illuminators), 50/60Hz
- 120Vac, 0.8A, 50/60Hz

 Power consumption:
 

- 100W
- 150-190W max with LED illuminators in 24Vac
- 24W, P&T stopped, heating switched off

 Version with integrated camera:
 

- 26.5W, P&T stopped, heating switched off

 Input cables size: AWG 16 (24Vac) - AWG 18 (120/230Vac)  
 Dimensions of signal cables: AWG 20-26  
 Housing standard heater: 24Vac, 20W max  
 4 alarm inputs: 10-35Vdc (2 alarm inputs, with LED illuminators)  
 2 dry contacts: 50Vdc max o30Vdc @1A (1 dry contact, with LED illuminators)  
 Video line: coaxial cable (1Vpp, 750hm)  
 Camera power supply: 12Vdc (800mA)  
 Power supply to the lens: 6-15Vdc (200mA max)  
 Zoom lens controller: polarity inversion and common wire  
 Functions: Autopan, Preset, Patrol  
 Maximum number of presets for protocol: 250 (VIDEOTEC MACRO)  
 15 characters string for Area and Preset titling  
 Configuration through OSD

**COMMUNICATIONS**

RS232 interface for PC control and firmware update  
 2-ports RS485: daisy chain configuration or RS232  
 Addressable through dip-switch up 255 units

**PROTOCOLS**

Configuration of telemetry protocol parameters through dip-switch  
 AMERICAN DYNAMICS, PANASONIC, PELCO D, VIDEOTEC MACRO, VISTA  
 AMERICAN DYNAMICS, PANASONIC, PELCO, VISTA are registered trademarks.

*The product may be interfaced with devices not manufactured by VIDEOTEC. It is possible that the interface protocols have changed or are in a different configuration from earlier tested units by VIDEOTEC. VIDEOTEC recommends a test prior to installation. VIDEOTEC will not be liable for any installation costs or lost revenues in the event a compatibility problem will occur.*

**ENVIRONMENT**

Indoor/Outdoor  
 Operating temperature (with heater): -20°C (-4°F)/+60°C (140°F)  
 Operating temperature (with reinforced heater): -30°C (-22°F)/+60°C (140°F)  
 Wind resistance (without LED illuminators):
 

- Operational: up to 160km/h
- Stationary: up to 210km/h

 Surge immunity: up to 2kV line to line, up to 4kV line to earth (Class 4)

**CERTIFICATIONS**

Electrical safety: EN60950-1, IEC60950-1  
 Photobiological safety of lamps and lamp systems (LED illuminators): EN62471  
 Electromagnetic compatibility: EN61000-6-3, EN55022 (Class A), FCC Part 15 (Class B)  
 Immunity: EN50130-4  
 Outdoor installation: EN60950-22, IEC60950-22  
 UL certification: cULus Listed (TYPE 4X) (not for thermal cameras version)  
 IP protection degree: EN60529 (IP66)  
 Resistant to salty fog: EN50130-5, EN60068-2-52  
 EAC certification

**ACCESSORIES**

UPTIRN108A00	LED illuminator for ULISSE, 10°, 850nm, 24Vac - 12/24Vdc
UPTIRN308A00	LED illuminator for ULISSE, 30°, 850nm, 24Vac - 12/24Vdc
UPTIRN608A00	LED illuminator for ULISSE, 60°, 850nm, 24Vac - 12/24Vdc
UPTIRN109A00	LED illuminator for ULISSE, 10°, 940nm, 24Vac - 12/24Vdc
UPTIRN309A00	LED illuminator for ULISSE, 30°, 940nm, 24Vac - 12/24Vdc
UPTIRN10WA00	LED illuminator for ULISSE, 10°, white light, 24Vac - 12/24Vdc
UPTIRN30WA00	LED illuminator for ULISSE, 30°, white light, 24Vac - 12/24Vdc
UPTIRN60WA00	LED illuminator for ULISSE, 60°, white light, 24Vac - 12/24Vdc
UPTIRPS230N	External power supply for ULISSE series, prearranged for two LED illuminators, and control to synchronize IR illuminators with camera Day/Night switching, IN 230Vac, in weatherproof box. Twilight sensor included.
UPTIRPS100N	External power supply for ULISSE series, prearranged for two LED illuminators, and control to synchronize IR illuminators with camera Day/Night switching, IN 100Vac, in weatherproof box
UPTIRPS120UL	External power supply for ULISSE series, prearranged for two LED illuminators, and control to synchronize IR illuminators with camera Day/Night switching, IN 120Vac, in weatherproof box. Twilight sensor included.
UPTHT1	Cold pack for low temperature 24Vac, 30W
UPTHT2	Reinforced heater for block camera 24Vac, 30W
UPTJBUL	Junction weatherproof box for cables connexion (according UL norm)

WASPT0V5L5M00	Water tank 5l, pump with delivery up to 5m (16ft), IN 230Vac-24Vac-120Vac
WASPT0V23L5M00	Water tank 23l, pump with delivery up to 5m (16ft), IN 230Vac-24Vac-120Vac
WASPT0V23L11M00	Water tank 23l, pump with delivery up to 11m (36ft), IN 230Vac-24Vac-120Vac
WASPT1V23L30M00	Water tank 23l, pump with delivery up to 30m (98ft) with water floating, IN 230Vac
WASPT3V23L30M00	Water tank 23l, pump with delivery up to 30m (98ft) with water floating, IN 120Vac

**RELATED PRODUCTS**

ALBERT	Encoder for video content analysis and smart system management
SM82A	Video matrix 8 inputs and 2 outputs
SM164B	Video matrix 16 inputs and 4 outputs
SM328B	Matrix 32 inputs and 8 outputs
DCJ	Keyboard for video and telemetry control
DCT	Video and telemetry touch-screen control keyboard
DCZ	Universal control keyboard for PC applications

**BRACKETS AND ADAPTORS**

UPTWBA	Wall bracket with internal cable channel
UPTWBTAB	Parapet bracket with internal cable channel
PTCC1	Pole mount adaptor
WCWGC	Corner mount adaptor

**PACKAGE**

Model Number	Weight	Dimensions (WxHxL)	Master carton
UPT1SVSA000E	19.5kg (43lb)	66x33x57cm (26x13x22in)	-
UPT2SVKA000E	20kg (44lb)	66x33x57cm (26x13x22in)	-
UPT1SVGA000E	19.5kg (43lb)	66x33x57cm (26x13x22in)	-

**ULISSE - CONFIGURATION OPTIONS**

	Voltage	Day/Night camera		Options		Video output	
<b>UPT</b>	<b>1</b> 230Vac	<b>S</b> Without Day/Night camera	<b>V</b>	<b>S</b> Without accessories	<b>A</b>	<b>O</b> Analog	<b>OOE</b>
	<b>2</b> 24Vac	<b>P</b> Day/Night camera 36x optical zoom lens, PAL		<b>W</b> With wiper			
	<b>3</b> 120Vac	<b>Q</b> Day/Night camera 28x optical zoom lens, PAL		<b>K</b> With brackets for UPTIRN (only 24Vac, illuminators not included)			
		<b>N</b> Day/Night camera 36x optical zoom lens, NTSC		<b>J</b> With wiper and brackets for UPTIRN (only 24Vac, illuminators not included)			
		<b>M</b> Day/Night camera 28x optical zoom lens, NTSC		<b>G</b> With germanium front window for thermal cameras applications			

*Not all combinations are possible.*

DAY/NIGHT CAMERA FEATURES				
	Day/Night 36x		Day/Night 28x High sensitivity	
	PAL	NTSC	PAL	NTSC
Optical zoom	36x		28x	
Wide Dynamic Range (Fix/Auto)	✓		-	
True progressive SCAN	✓		-	
Digital image stabilisation	✓		✓	
White balance	Auto, ATW, Indoor, Outdoor (Fix/Auto), Sodium Vapor Lamp (Fix/Auto)		Auto, ATW, Indoor, Outdoor (Fix/Auto), Sodium Vapor Lamp (Fix/Auto)	
High horizontal resolution	Up to 550 TV Lines		Up to 550 TV Lines	
Day/Night (Auto ICR)	✓		✓	
Image Sensor	1/4" EXView HAD CCD		1/4" Super HAD CCD II	
Number of effective Pixels	~ 440000 pixel	~ 380000 pixel	~ 440000 pixel	~ 380000 pixel
Min. Color illumination (IR-Cut Filter = OFF)	1.4Lux / 1/50s 0.1 Lux / 1/3s	1.4Lux / 1/60s 0.1 Lux / 1/4s	0.25Lux / 1/50s 0.16 Lux / 1/3s	0.25Lux / 1/60s 0.16 Lux / 1/4s
Min. B/W illumination	0.01 Lux / 1/3s	0.01 Lux / 1/4s	0.0015 Lux / 1/3s	0.0015 Lux / 1/4s
"Shutter Time" automatic increase to improve the night surveillance	✓		✓	
S/N ratio	Greater than 50dB		Greater than 50dB	
AE control	Automatic, Shutter priority, Diaphragm priority, Brightness priority and Manual		Automatic, Shutter priority, Diaphragm priority, Brightness priority and Manual	
Back light compensation	On/Off		On/Off	
Spherical masking (3D) of Privacy zones with automatic upgrade	✓		✓	
Privacy Zone Masking	On/Off (24 positions)		On/Off (24 positions)	
Maximum number of masking blocks to be displayed	8		8	
Resolution of masking blocks	160x120 HxV		160x120 HxV	
Masking	Up to 15 different masking types: 14 colour types or mosaic		Up to 15 different masking types: 14 colour types or mosaic	
Focusing system	Auto (Sensitivity: Normal, Low), Trigger PTZ, Manual		Auto (Sensitivity: Normal, Low), Trigger PTZ, Manual	
"Smart" lens control	Automatic Lens Reset		Automatic Lens Reset	
High Zoom and Wide Horizontal Field of View Capability	✓		✓	
Optical zoom	36x, f=3.4 (wide) to 122.4mm (tele) / F1.6 to F4.5		28x, f=3.5 (wide) to 98mm (tele) / F1.35 to F3.7	
Digital Zoom	12x (432x with optical zoom)		12x (336x with optical zoom)	
Angle of view (A)	57.8 degrees (wide) to 1.7 degrees (tele)		55.8 degrees (wide) to 2.1 degrees (tele)	
Minimum object distance	320mm (12.6in) (wide) to 1500mm (59.1in) (tele)		10mm (0.4in) (wide) to 1500mm (59.1in) (tele)	
Electronic Iris Speed	1/1 ÷ 1/10000s		1/1 ÷ 1/10000s	

DISTANCES IN NIGHT MODE WITH DAY/NIGHT CAMERA 36X			
Application	Configuration <sup>1</sup>	Night Mode + ASS <sup>2</sup>	HFOV <sup>3</sup> (ASS)
Far away subjects, perimeter control	UPTIRN108A00 + UPTIRN108A00	120m (393ft)	20m (66ft)
Nearby areas, parking lots, access control	UPTIRN308A00 + UPTIRN308A00	60m (197ft)	32m (105ft)
	UPTIRN608A00 + UPTIRN608A00	40m (131ft)	46m (151ft)
Mixed solutions	UPTIRN108A00 + UPTIRN308A00	105m (344ft)	18m (59.1ft)
	UPTIRN308A00 + UPTIRN608A00	50m (164ft)	26m (85ft)

<sup>1</sup> To ensure the performances, the two illuminators must be correctly aligned.


<sup>2</sup> ASS: auto slow shutter mode set

<sup>3</sup> HFOV - Horizontal Field of View: width of the illuminated area at the maximum reachable distance.

The distances are in meters and refer to the displaying of images at night time which have enough quality to identify and classify an abnormal situation and the type of subject within the range of the pan & tilt unit. The distances also depend on the reflection coefficient of the surfaces present on the illuminated scene.

**TECHNICAL DRAWINGS**


Sizes in millimeters.

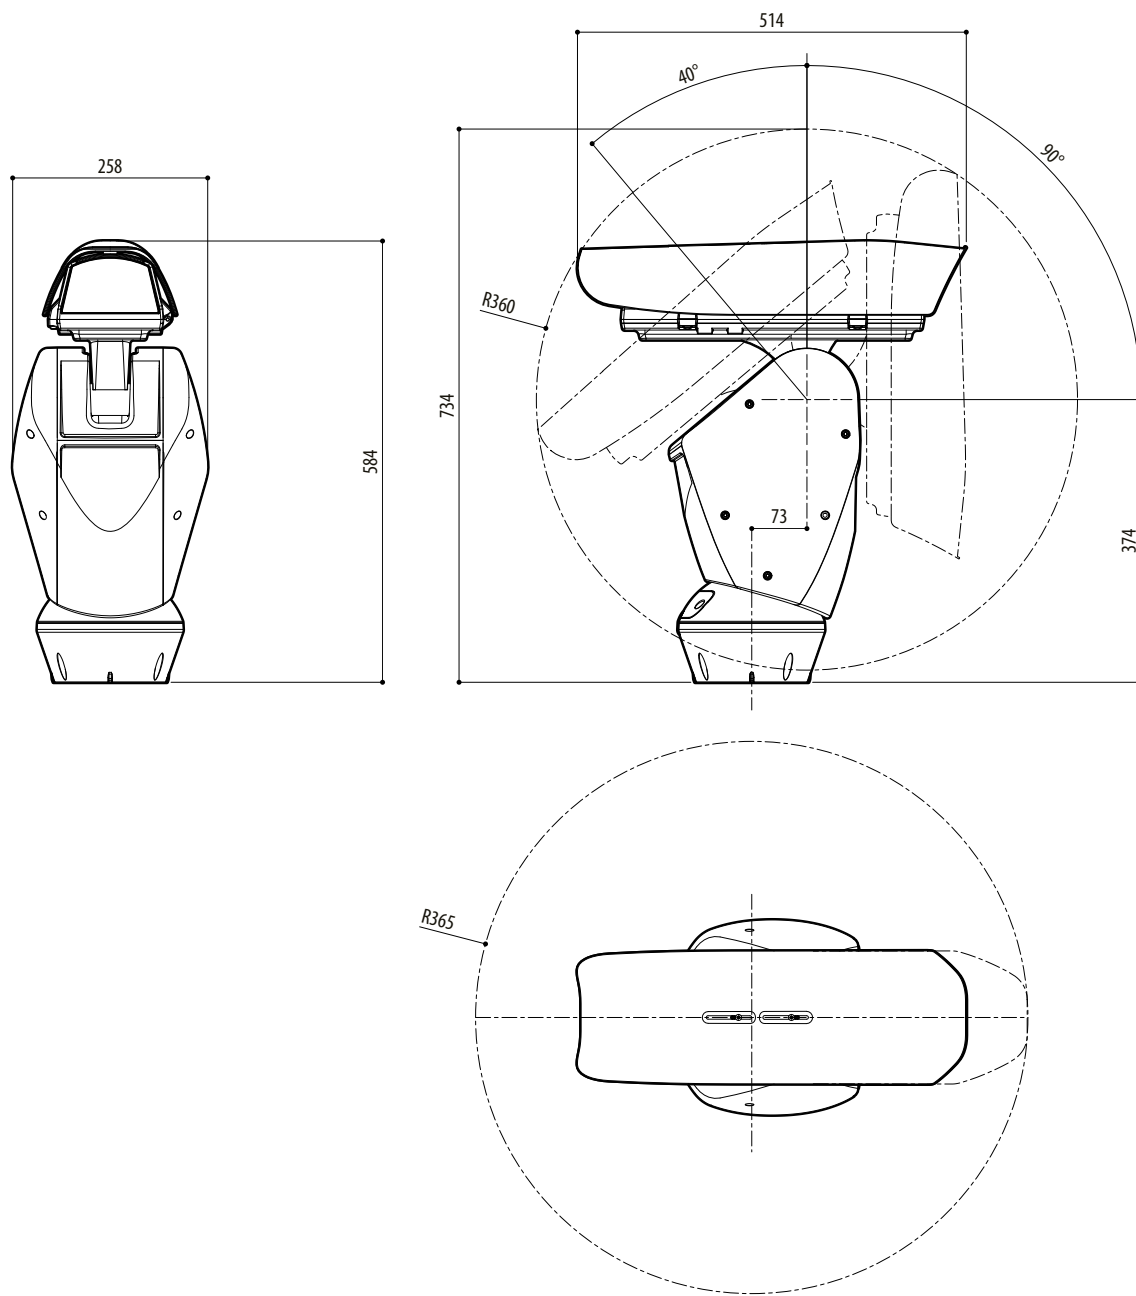

ULISSE

**TECHNICAL DRAWINGS**


Sizes in millimeters.

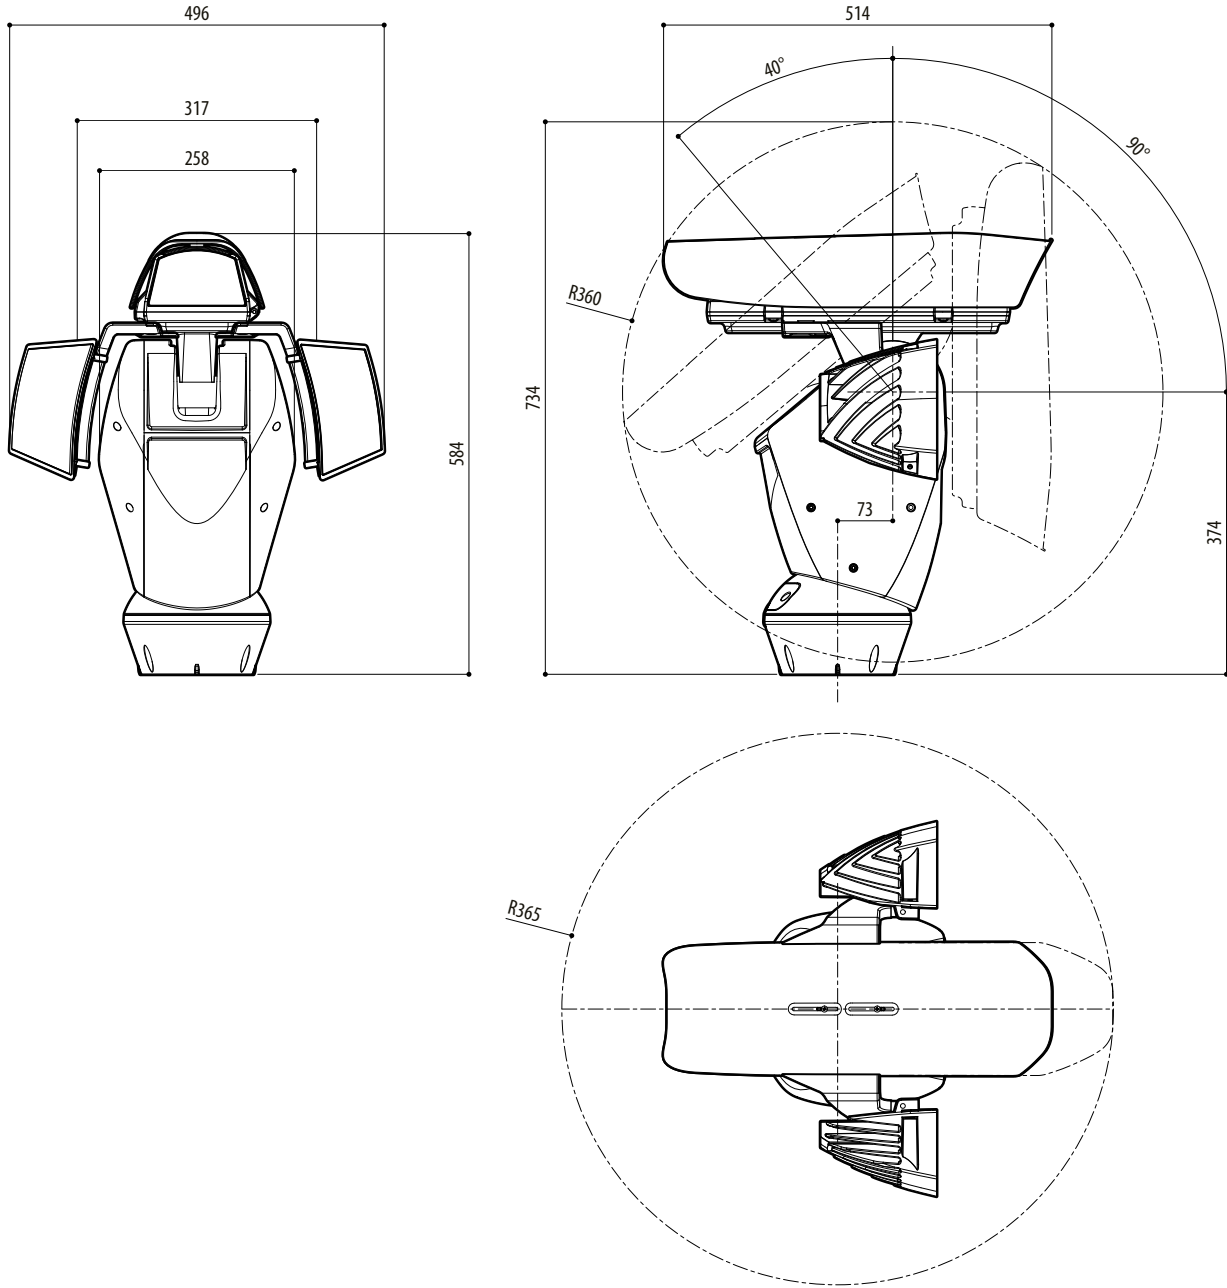




ULISSE, PRE-ARRANGED VERSION FOR TWO LED ILLUMINATORS INSTALLATION

**TECHNICAL DRAWINGS**

Sizes in millimeters.






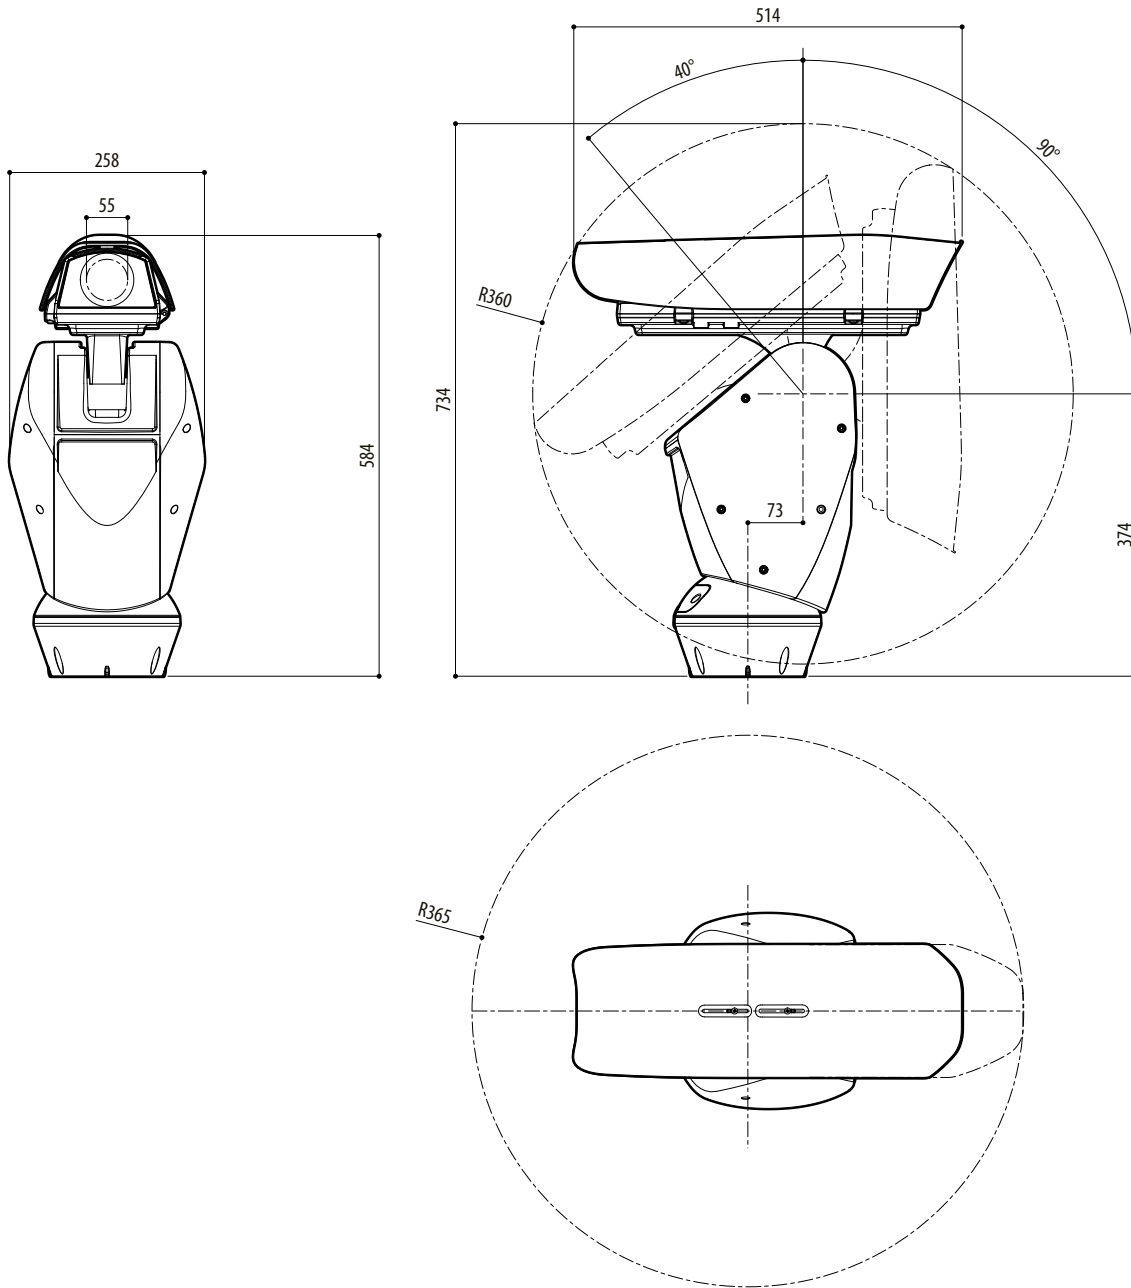


ULISSE, VERSION FOR THERMAL CAMERAS









SLIDE IN STANDARD POSITION

SLIDE IN STANDARD POSITION, REINFORCED HEATER

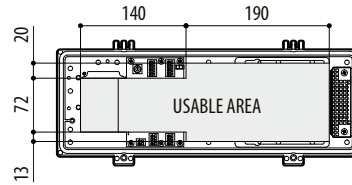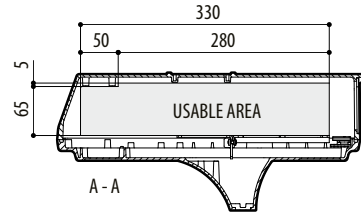







REVERSED SLIDE

SLIDE IN REVERSED SLIDE, REINFORCED HEATER

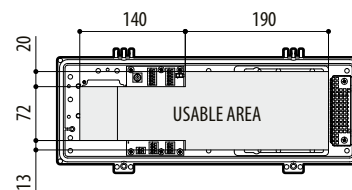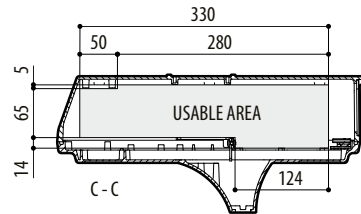

SLIDE IN STANDARD POSITION, INTEGRATED WIPER

SLIDE IN STANDARD POSITION, INTEGRATED WIPER, REINFORCED HEATER

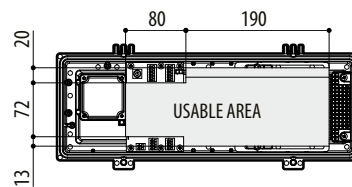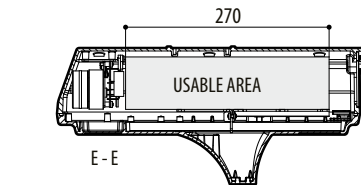

REVERSED SLIDE, INTEGRATED WIPER

REVERSED SLIDE, INTEGRATED WIPER, REINFORCED HEATER

