

# L-DALI-PWRx-U Power Supply

## Installation instructions

Instructions de montage


Montageanweisung

Montagevoorschrift


Istruzioni di montaggio



Instrucciones de montaje

Monteringsanvisning

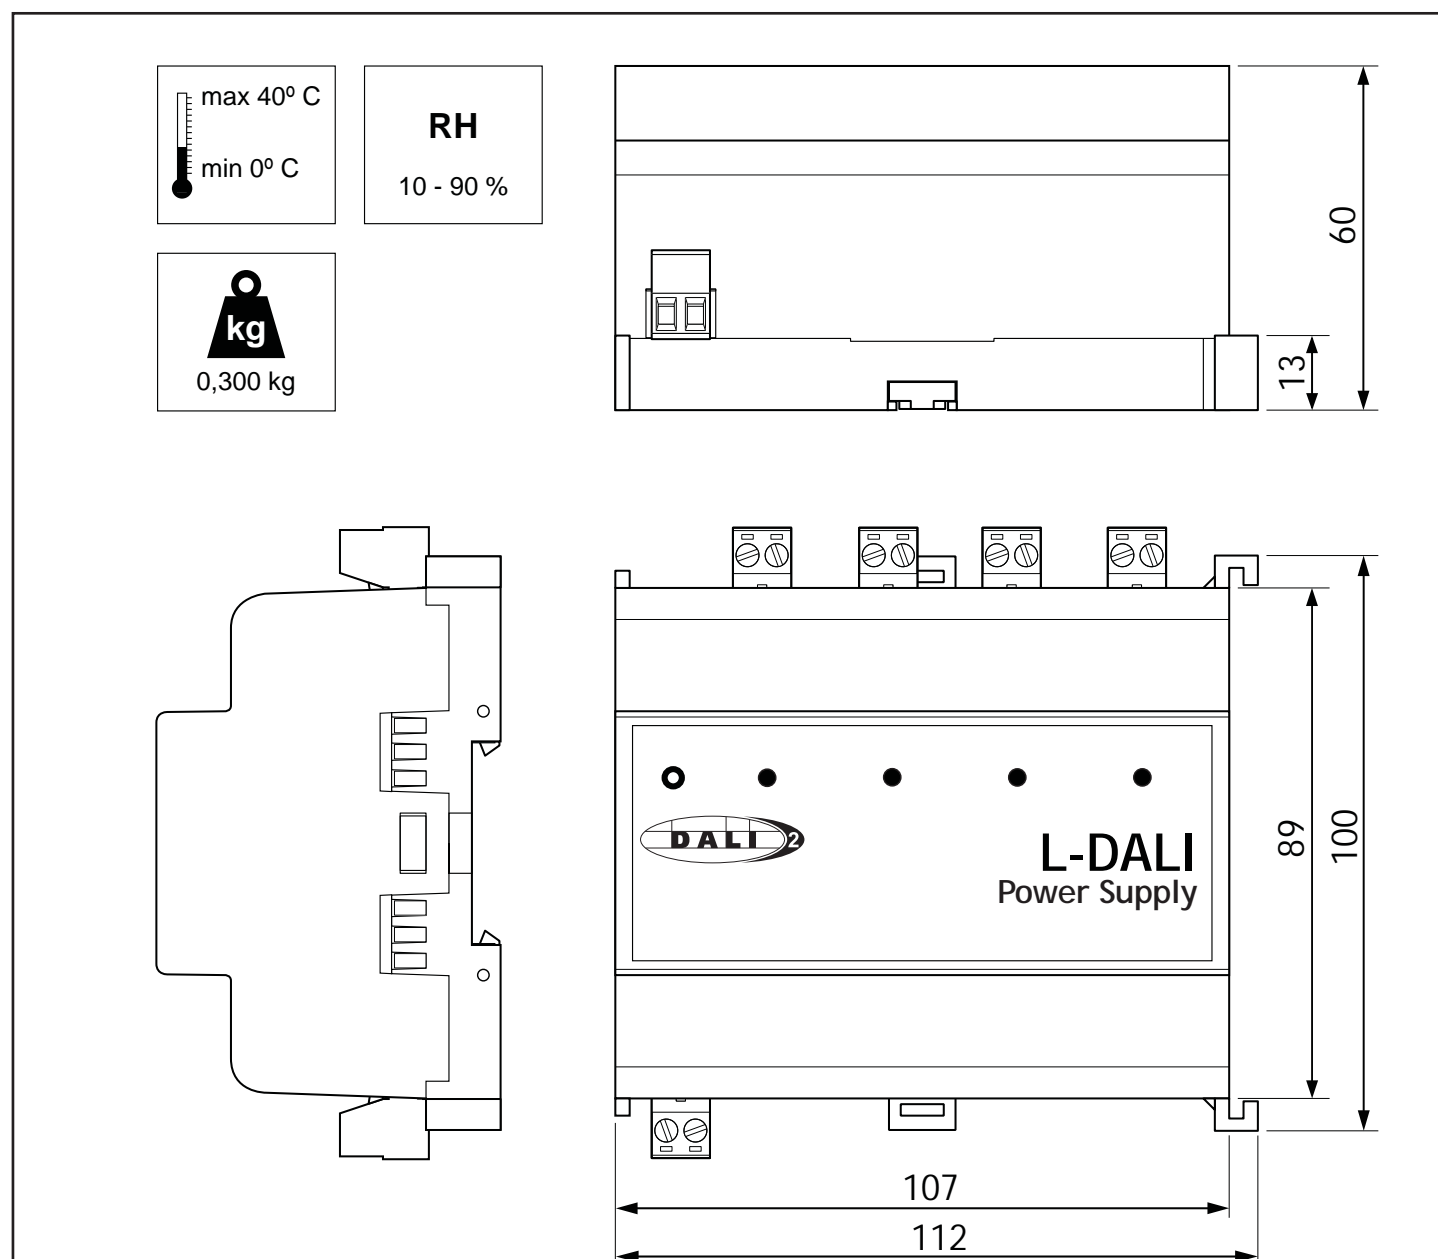


35 mm x 7.5 mm DIN rail (EN 50022, BS 5584, DIN 46277-3)

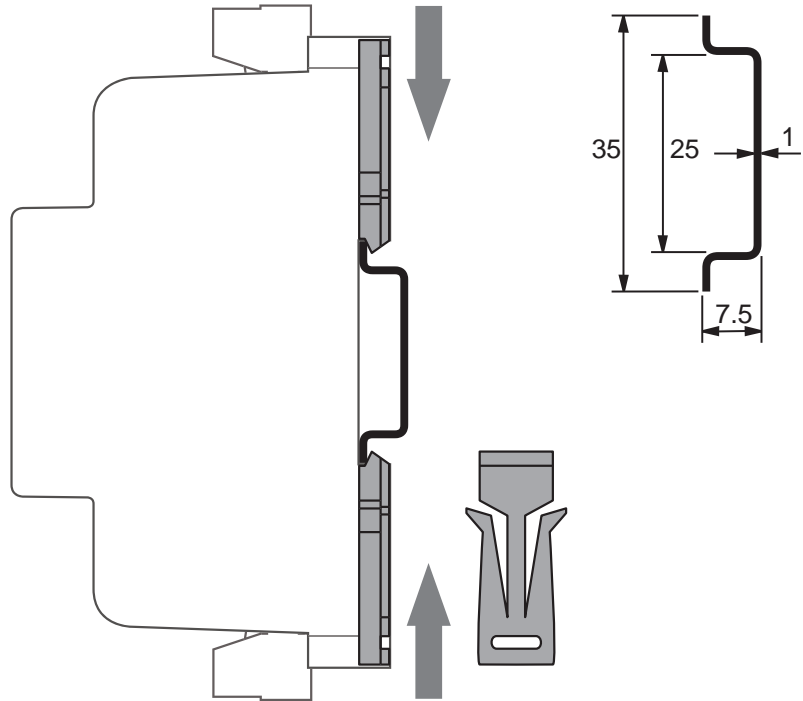

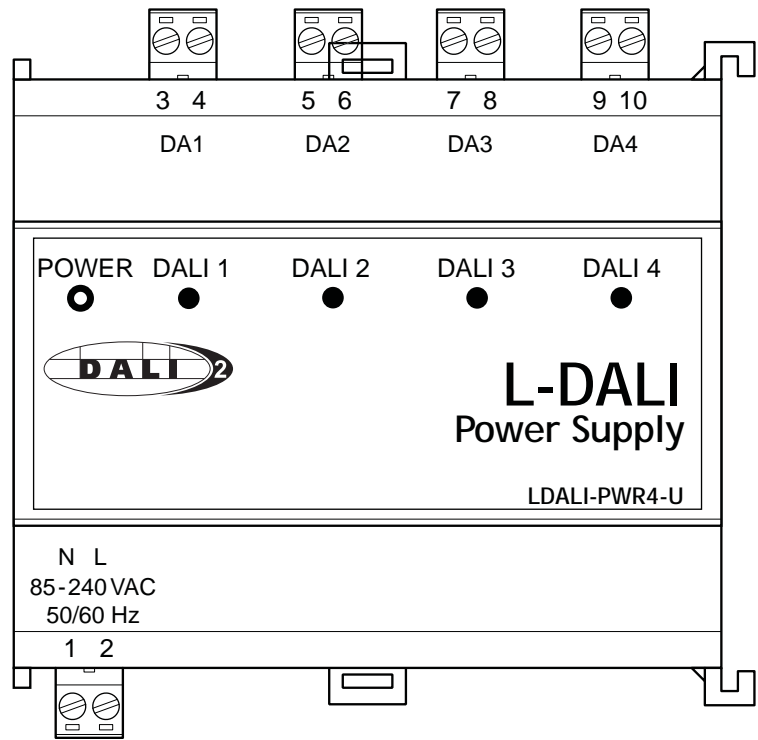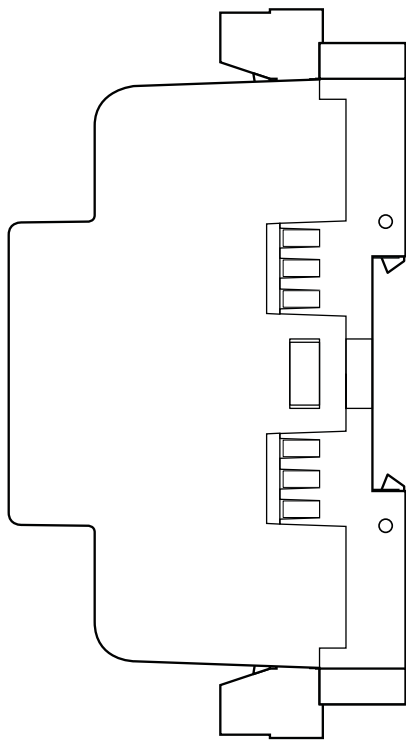


Connectors		
POWER INPUT 85-240 VAC 50 / 60 Hz	1	Input N, neutral line
	2	Input L, phase line
DALI 1 18V, 116mA	3	Output PLUS
	4	Output MINUS
DALI 2 18V, 116mA	5	Output PLUS
	6	Output MINUS
DALI 3 18V, 116mA	7	Output PLUS
	8	Output MINUS
DALI 4 18V, 116mA	9	Output PLUS
	10	Output MINUS

Status LED		
POWER	GREEN	Power supply OK
	LED is OFF	Main side is down, short circuit, or hardware failure
DALI 1 - 4	GREEN	Output OK
	LED is OFF	Output thermally overloaded



2 poles: Weidmüller BLZP 5.08/02/180

0.2 - 2.5 mm<sup>2</sup>



4.5 lb-in/0.5 Nm

