




# SPE blocking element incl. flush mounting kit

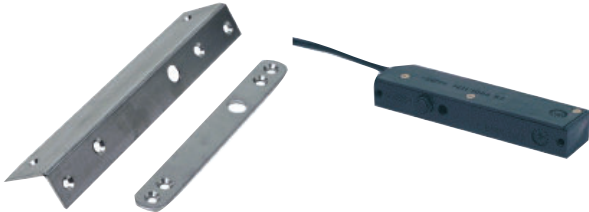


The blocking element incl. kit is for installation on the frame or on the door.


## Functions

Both a standard collar and an angled collar are available.


### Blocking element

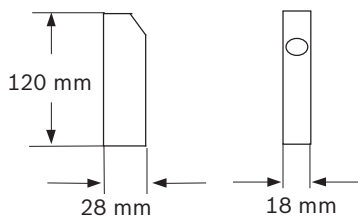

### Angled collar

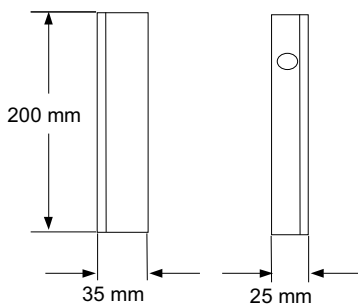

### Standard collar

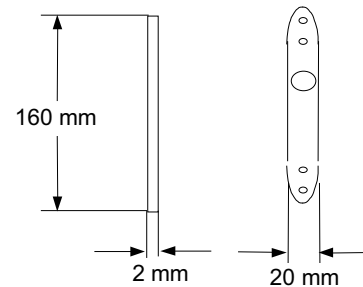

## Certifications and Approvals

Region	Certification
Europe	CE Sperrelement SPE

## Technical Specifications

SPE blocking element

Bolts max. distance to locking plate	4 mm
Break force for emergency open	0.8 to 1 kN
Cable to control unit	Max. 6 m, 6-pin, shielded, permanently cast
Environmental conditions	
• Protection category	IP 44
• Operating temperature	-25 °C to +55 °C
• Storage temperature	-40 °C to +85 °C
Housing	
• Material	ABS
• Color	RAL 9002
Dimensions (H x W x D)	28 x 118 x 16 mm
Weight	0.40 kg

### Ordering Information

**SPE blocking element incl. flush mounting kit**      **4998021691C20;4**  
**998149110**  
For installation in frame/door

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**